

# МАТЕРИАЛЫ

XX Международной научно-практической конференции  
имени профессора Л.П. Кулёва студентов и молодых ученых

## ХИМИЯ И ХИМИЧЕСКАЯ ТЕХНОЛОГИЯ В XXI ВЕКЕ

# ХХТ-2019

20–23 мая 2019 г.

г. Томск

---

Влияние нефтяных и газовых месторождений на компоненты геологической среды .....	484
<i>А.С. Филинов</i>	
Оценка массообменных характеристик аппаратов для реакции окисления сульфидных растворов кислородом .....	485
<i>К.А. Хрустова</i>	
Применение позитронной спектроскопии для исследования структуры природных полимеров на примере сосны сибирской кедровой .....	487
<i>Цуй Цзян, Р.С. Лаптев, Ю.С. Бардулее</i>	
Экологически безопасный метод определения синтетических красителей с помощью оптического сенсора .....	488
<i>Д.В. Чекинбаев, А.В. Золоторев</i>	
Химический состав загрязнителей в почвах и техносомах с. Ханчеринга .....	490
<i>К.С. Юрчук, Е.В. Петранкова, Г.Ю. Злобина</i>	
<b>СЕКЦИЯ 7 ХИМИЯ И ХИМИЧЕСКАЯ ТЕХНОЛОГИЯ НА ИНОСТРАННОМ ЯЗЫКЕ .....</b>	<b>492</b>
Distribution of polyphenols from the plant <i>Urtica dioica</i> L. ....	492
<i>M.B. Akhtaeva, U.Sh. Ozkenova</i>	
The influence of Zeoforming process temperature on the products composition .....	493
<i>A.A. Aitymov, I.A. Bogdanov</i>	
3-butyl-1,3-dioxane and its derivatives synthesis .....	495
<i>Azizbek Leila, Moldir</i>	
Studying the influence of catalyst deactivation on the process of diesel fuel catalytic dewaxing .....	495
<i>D.F. Bogdanov</i>	
Group composition of diesel fuel as a factor of different susceptibility of low-temperature additives .....	497
<i>I.A. Bogdanov, A.A. Aitymov</i>	
Arc discharge plasma as a way to obtain silicon carbide .....	498
<i>O.A. Bolotnikova</i>	
Mathematical modeling of catalytic reforming process .....	499
<i>I.R. Dolgov</i>	
Gramicidin S composition with surfactants for liquid drug formulation .....	500
<i>A.A. Dronnikov</i>	
Technological processes of Uranium extraction .....	501
<i>A.S. Dyundik</i>	
Mathematical modeling of chemical technology of hydrocarbons pyrolysis .....	502
<i>A.A. Eremina</i>	
Characteristics of coatings based on maleinized aliphatic petroleum resins .....	503
<i>S.I. Gamzatova, L.A. Mikhayeva</i>	
Process integration and optimization in chemical engineering .....	504
<i>C.E. Garcia Sargas</i>	
The influence of pulsed e-beam treatment on properties of PCL scaffolds loaded by paracetamol .....	506
<i>I.M. Kolesnik, V.L. Rudnyavtseva, A.A. Rakina, T.I. Spiridonova</i>	
Extraction of rare earth metals from magnet waste .....	508
<i>K.I. Merkel, E.U. Grechenok</i>	
Neutralization of white phosphorus by microbial culture .....	509
<i>A.Z. Mindubaev</i>	
Powerful water-soluble oxidizing hypervalent iodine reagents: structure and reactivity .....	510
<i>I.A. Mironova</i>	

## 5-BUTYL-1,3-DIOXANE AND ITS DERIVATIVES SYNTHESIS

Azlibek Lella, Moldir

Scientific adviser – Bazhikova G.B

Al-Farabi Kazakh National University, azlibek94@inbox.ru

At present, the possibility of rational use of dioxane is very high. 1,3-dioxane and its derivatives are used as regulators of plant growth. The development of technology for the production of 1,3-dioxane derivatives used as flotation agents and plant growth regulators will allow them to be used in agricultural and mining industries in accordance with Kazakhstan's innovative development requirements.

In 1,3-dioxanes, compounds with anti-inflammatory, anti-inflammatory and antiviral properties have been studied. Diseases that are due to various environmental factors are now being resolved and treated as a result of the search and synthesis of effective drugs. They are used as the agent of action and fumigant as a substance in the synthesis of substances such as antibiotics and insecticides.

Our work is based on Prince reaction on synthesis of 5-butyl-1,3-dioxane and its new derivatives by condensation. 5-butyl-1,3-dioxane was obtained as a result of condensation of Hexan-1 and formaldehyde in the ratio 1:2 in the presence of the acidified catalyst. When the optimal temperature exceeded 70 °C, the additional product was formed

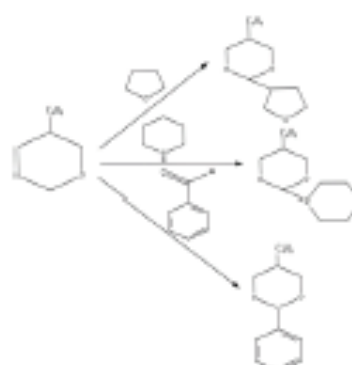


Fig. 1. General scheme of synthesis of new 5-butyl-1,3-dioxane derivatives

of 1,3-dihydroxygenate.

5-butyl-1,3-as a result of the condensation reaction of dioxane in an acidic medium in a ratio of 1:1 with tetrahydrofuryl-5-butyl-1,3-dioxane, 2-piperidine-5-butyl-1,3-dioxane and 2-phenyl-5-butyl-1,3-dioxane. The optimum temperature of the formed product is 65 °C, 61 °C and 80 °C.

## STUDYING THE INFLUENCE OF CATALYST DEACTIVATION ON THE PROCESS OF DIESEL FUEL CATALYTIC DEWAXING

D.F. Bogdanov

Scientific adviser – Candidate of engineering sciences, assistant professor N.S. Belinskaya

Linguistic adviser – Candidate of engineering sciences, assistant professor N.S. Belinskaya

National Research Tomsk Polytechnic University

634050, Russia, Tomsk, 30 Lenin Avenue, belinskaya@tpu.ru

The process of catalytic dewaxing is aimed to produce diesel fuel, having low freezing temperature from -18 °C to -60 °C. The fuel in this case is called winter diesel fuel and arctic diesel fuel [1].

The freezing temperature is mainly determined by the content of long straight-chain paraffins [2]. These normal paraffins undergo the reaction hydrocracking in the process of catalytic dewaxing to form short-chain normal paraffins and iso-paraffins, which have much lower freezing points [3].

The aim of this work is to study the influence of catalyst deactivation on the process of catalytic dewaxing.

To perform calculations, computer modeling

system of the catalytic dewaxing process was applied. This system is based on the mathematical model of the process.

As the initial data, two different feedstock compositions were used. The feedstock differs by the content of long-chain normal paraffins. The content of n-paraffins in the first feedstock is 14 wt. %. The content of n-paraffins in the second feedstock is 21 wt. %. For each of these feedstock compositions the study of catalyst deactivation influence on the process of catalytic dewaxing was studied. Technological parameters for the calculations were taken as: feedstock flow rate was 310 m<sup>3</sup>/h, flow rate of hydrogen-containing gas was 30000 m<sup>3</sup>/h, temperature