

5th International Symposium on Knowledge Acquisition and Modeling (KAM 2015)

Advances in Intelligent Systems Research Volume 80

London, United Kingdom
27 – 28 June 2015

Editor:

W. Deng

ISBN: 978-1-5108-1348-9

Printed from e-media with permission by:

Curran Associates, Inc.
57 Morehouse Lane
Red Hook, NY 12571



Some format issues inherent in the e-media version may also appear in this print version.

Copyright© (2015) by Atlantis Press
All rights reserved.
<http://www.atlantis-press.com/php/pub.php?publication=kam-15>

Printed by Curran Associates, Inc. (2015)

For permission requests, please contact Atlantis Press
at the address below.

Atlantis Press
29 avenue Laumière
75019 Paris
France

contact@atlantispress.com

Additional copies of this publication are available from:

Curran Associates, Inc.
57 Morehouse Lane
Red Hook, NY 12571 USA
Phone: 845-758-0400
Fax: 845-758-2634
Email: curran@proceedings.com
Web: www.proceedings.com

TABLE OF CONTENTS

KNOWLEDGE ENGINEERING AND COMPUTER SCIENCE

DESIGN OF REMOTE STRUCTURAL MONITORING SYSTEM BASED ON LABVIEW AND LINUX	1
<i>Jing Yubing, Zhao Hui</i>	
RESEARCH ON MULTI-PERIOD STOCHASTIC INVENTORY MODEL OF TOBACCO COMMERCIAL ENTERPRISE	4
<i>Huang Dongbing, Zhang Dandan</i>	
AN APPLICATION OF VIRTUAL ASSESSMENT AND ENHANCED TESTING METHODS IN DEVELOPING OF AERIAL PRESSURE SENSOR SYSTEM	7
<i>Li Weilin, Li Zhiqiang, Li Xiaoxiao, Qin Sha</i>	
A NOVEL IDENTIFICATION METHOD OF TWO PHASE FLOW BASED ON LDA FEATURE EXTRACTION AND GRNN IN ERT SYSTEM	12
<i>Zhang Yanjun</i>	
DIFFERENCE ANALYSIS BETWEEN SAFETY MANAGEMENT SYSTEM AND AIRWORTHINESS MANAGEMENT SYSTEM IN CIVIL AIRCRAFT DESIGN AND MANUFACTURE ORGANIZATION	15
<i>Li Sheng, He Pei, Lu Yao, Li Jing</i>	
FREQUENCY DETERMINATION OF BEAMS COUPLED BY A DOUBLE SPRING-MASS SYSTEM USING TRANSFER MATRIX METHOD OF LINEAR MULTIBODY SYSTEMS	21
<i>Abbas Laith K., Zhou Qinbo, Rui Xiaoting</i>	
PARAMETER IDENTIFICATION OF WIND POWER SYSTEM LOW FREQUENCY OSCILLATION BASED ON MATRIX PENCIL ALGORITHM AND STABILIZATION DIAGRAM	25
<i>Xie Guoqiang, Pan Benren, Xiong Lixia, Zou Jin, Yu Kansheng</i>	
SYSTEM INTEGRATION OF PLM AND ERP BASED ON CLOUD COMPUTING	29
<i>Tang Guochun</i>	
AUTOMOBILE GENERAL EQUIPMENT DEPARTMENT WORKSHOP WAREHOUSING SYSTEM SIMULATION STUDY	33
<i>Pi Daijun, Li Qingsong</i>	
TECHNICAL RESEARCH OF CRANE RELIABILITY CONTROL BASED ON NEURAL NETWORK	37
<i>Yu Janli, Zhou Ruitang, Wu Zhifei</i>	
SELF-RELATED PROCESS RESIDUAL CONTROL CHART BASED ON NEURAL NETWORK	41
<i>Yu Janli, Han Yang, Miao Manxiang, Huang Hongqi</i>	
MEASUREMENT OF SOME PARAMETER IN WIND TUNNEL EXPERIMENT BASED ON ZIGBEE	44
<i>Yuan Zhiqiang</i>	
AN INTELLIGENT ALGORITHM OF BI-LEVEL PROGRAMMING MODEL FOR THREE-STAGE SUPPLY CHAIN	47
<i>Wang Rui, Zhao Shuang, Rao Renqiao</i>	
A METHOD FOR OCEAN TURBULENCE EFFECTIVENESS DETECTION AND INTELLIGENT PROCESSING BASED ON PSEUDO DISSIPATION RATE	51
<i>Song Dalei, Yan Qizhi, Wang Shuxin, Yang Hua, Zhu Yuchao</i>	
SIMULATION STUDY ON MECHANICAL PROPERTIES OF THREE-PHASE ASYNCHRONOUS MOTOR BASED ON MIXED PROGRAMMING	55
<i>Ma Tengfei, Wu Yanxiang, Lv You</i>	
STUDY ON THE TECHNICAL CHARACTERISTICS AND DEVELOPMENT DIRECTION OF 4G COMMUNICATION	57
<i>Liang Dehou, Zhang Yang</i>	
THE TRANSFORMATION OF SCHOOL AUDITORIUM SOUND REINFORCEMENT SYSTEM	60
<i>Zhang Yang</i>	
A REUSABLE DRIVING ENGINE FOR COMPLEX CONTROL SYSTEMS BASED ON EMBEDDED TCP/IP	63
<i>Zhang Zhichun, Xiao Jingxin, Xu Wen, Zhao Zhenpen, Tang Shengquan, Bu Jian</i>	

IMPLEMENTATION OF THE MODEL FOR IDENTIFYING AND REFERRING HARDWARE IN COMPLEX SIMULATION SYSTEMS	67
<i>Zhang Zhichun, Xiao Jingxin, He Yun, Zhao Zhenpen, Tang Shengquan, Bu Jian</i>	
LIGHTWEIGHT RFID PRIVACY PROTOCOL BASED ON UNIVERSAL HASH FUNCTION	71
<i>Gao Shu-Jing, Zhang Rui-Quan</i>	
THE DYNAMIC RATE-LIMITING FILTERING BASED ON PREPROCESSING SENSOR DATA.....	74
<i>Tang Chao, Wan Zhou</i>	
A SHIP MISSION RELIABILITY MODELING METHOD BASED ON GTST IN SCHEMATIC DESIGN PHASE.....	76
<i>Yang Jianjun, Li Fang</i>	
CONFIGURATION ANALYSIS OF A VARIABLE-TOPOLOGY MOBILE ROBOT.....	82
<i>Tian Hai-Bo, Li Ai-Min</i>	
APPLICATION OF MULTIMEDIA AND NETWORK IN SPECIALIZED ENGLISH FOR AUTOMATION.....	86
<i>Wang Xiyan, Wang Tianhao</i>	
TEACHING STRATEGIES OF SPECIALIZED ENGLISH FOR AUTOMATION ASSISTED BY MULTIMEDIA AND NETWORK	89
<i>Wang Xiyan, Wang Tianhao</i>	
A STUDY ON SIMULATION OF SINGLE SAILING TRAINING SYSTEM	92
<i>Chang Xiaofeng, Luan Xin, Hou Guojia</i>	
ENTROPY EVALUATION OF INDUSTRIAL UPGRADING OF MINING AREA	96
<i>Ji Shuailing, Zhang Rui</i>	
RESEARCH OF A WEIGHTED MULTI-LINK LOAD BALANCE NETWORK MODEL BASED ON P2P	100
<i>Li Jiao, Liang Gongqian, Liu Tianshi</i>	
DYNAMIC MODELLING AND ANALYSIS OF PERFORMANCE FOR THE ELECTROMAGNETIC-DRIVEN SPHERICAL ROBOT	103
<i>Sang Shengju</i>	
THE STUDY OF QUANTUM PLATFORM IN UNDERWATER GLIDER	107
<i>Qi Shengbo, He Zengchuan, Chai Ying, Yao Lele, Zhang Chenglun, Song Dalei</i>	
SIMULATION ANALYSIS OF SUPPLY CHAIN SYSTEM UNDER EMERGENCIES BASED ON MULTI-AGENT MODEL	111
<i>Li Qianying, Wang Jirong, Song Dawei, Li Jun</i>	
MULTIPARTY BIDIRECTIONAL QUANTUM SECURE COMMUNICATION BASED ON CLOSED QUBIT TRANSMISSION	116
<i>Yin Xunru</i>	
RESEARCH ON TWICE SINGLE-DIRECTION NEGOTIATION PROCESS ON SINGLE-LAYER USER-DATA SWITCHING PLATFORM ARCHITECTURE	120
<i>Guo Yangyong, Yu Wei, Hu Jun</i>	
DESIGN ON TESTER OF FRUIT SURFACE FRICTION	123
<i>Yang Lei, Song Xin, Li Yancong, Shan Huiyong</i>	
A LOW ORDER NONCONFORMING MIXED FINITE ELEMENT SCHEME FOR NONLINEAR INTEGRO DIFFERENTIAL EQUATIONS OF PSEUDO-HYPERBOLIC TYPE.....	125
<i>Li Xianzhi, Zhang Kaiguang, Meng Hongling</i>	
A NOVEL K-COMBINATION FIRST-FIT ALGORITHM FOR THREE-DIMENSIONAL KNAPSACK PACKING PROBLEM.....	128
<i>Huang Xiaoyu, Qi Mingyao, Zhang Ying, Zhao Shulin</i>	
THE RESEARCH AND APPLICATION OF INTELLIGENT BROADCAST SYSTEM OF COAL MINE	132
<i>Guo Xiucan, Lu Xiaomin</i>	
APPLICATION AND RESEARCH OF SVM IN COAL MINE FAN CONDITION MONITORING.....	136
<i>Guo Xiucan, Wang Kaixuan</i>	
A SIMULATION TEST BASED ON IMPROVED SSL PROTOCOL	140
<i>Huang Xueqin, Qiang Geng</i>	
THE REAL-TIME ACQUISITION TERMINAL SYSTEM BASED ON MULTI-MACHINE PARALLEL	144
<i>Qiao Xinxiao</i>	
THE IT AUDIT OBJECTIVE RESEARCH BASED ON THE INFORMATION SYSTEM SUCCESS MODEL UNDER THE BIG DATA ENVIRONMENT.....	147
<i>Li Tingliao, Chen Lianghua</i>	

COMPUTER-ASSISTED LANGUAGE LEARNING AND THE IMPROVEMENT OF COMMUNICATIVE COMPETENCE	151
<i>He Qibin</i>	
PATH PLANNING OF ROBOTIC FISH BASED ON FUZZY CONTROL	155
<i>Li Xin, Deng Yansong</i>	
TIBETAN RECOGNITION SYSTEM BASED ON THE IMPROVED EXTRACTION ALGORITHM OF COMPLEXITY INDEX FEATURE	159
<i>Mai Zhiyuan, Xiang Wei</i>	
MODELING OF NONLINEAR DYNAMICS OF DRILL STRINGS IN A SUPERSONIC AIR FLOW	163
<i>Khajiyeva L. A., Kudaibergenov A. K.</i>	
OBJECT TRACKING USING MEANSHIFT ALGORITHM COMBINED WITH KALMAN FILTER ON ROBOTIC FISH	168
<i>Li Xin, Xiang Wei</i>	
ANALYSIS ON ENERGY SAVING AND CONSUMPTION REDUCING OF WIRELESS SENSOR NETWORK	173
<i>Yang Xiaoqing</i>	
VIRTUAL DESIGN OF THE HYDRAULIC MANIFOLD BLOCK	177
<i>Guo Yinsai, Zhang Yi, Zeng Xiangfu, Zhang Mengyi</i>	
STUDY ON INFORMATION DEMANDS IN HEURISTIC TEACHING FOR LEARNERS	180
<i>Luo Qi</i>	

MATERIALS SCIENCE AND MANUFACTURING ENGINEERING

STUDY ON DESIGN OF CARBON-CREDIT'S COST ACCOUNTING SYSTEM FOR MANUFACTURING ENTERPRISES PROBLEMS	184
<i>Liu Chengzhi, Liu Bolun, Yang Ziang</i>	
FINITE ELEMENT CALCULATION AND EXPERIMENTAL VERIFICATION OF THE FIBERS MECHANICAL PROPERTIES IN THE REVERSING PROCESS	189
<i>Han Chenchen, Xue Wenliang, Cheng Longdi</i>	
SURROGATE ASSISTED TEACHING LEARNING BASED OPTIMISATION FOR PROCESS DESIGN OF A NON-CIRCULAR DRAWING SEQUENCE	193
<i>N. Pholdee, S. Bureerat, H. M. Baek, Y.-T. Im</i>	
APPLICATION OF KALMAN FILTER IN THE PREDICTION OF STOCK PRICE	197
<i>Xu Yan, Zhang Guosheng</i>	
FINITE ELEMENT SIMULATION OF GRINDING PERFORMANCE AND GRAIN SHAPES IN GRINDING SUPERALLOY-INCONEL	199
<i>Ma Lianjie, Yu Aibing, Wang Jia, Li Chen, Wang Fengwen</i>	
ROBUST OPTIMIZATION ANALYSIS ON GREEN MANUFACTURING PROCESS EVALUATION BASED ON ORDINAL INTERVAL PREFERENCE INFORMATION	202
<i>Lin Yaqin, Guo Chunxiang</i>	
THE ANALYSIS OF ELASTIC-PLASTIC MECHANICS OF BUS BODY CONSTRUCTION IN CONDITIONS OF ROLLOVER BY MEANS OF SIMULATION AND REAL TEST	206
<i>Orlov Lev, Rogov Peter, Tumasov Anton, Vashurin Andrey</i>	
EVALUATION RESEARCH ON MILITARY LOGISTICS DISTRIBUTION CENTER BASED ON SVM	210
<i>Yang Fan, Zhao Zhanbiao, Jiang Tianyuan, Dong Yucai</i>	
NUMERICAL STUDY ON COMBUSTION AND EMISSIONS PERFORMANCE OF DME-METHANOL ENGINE	213
<i>Zhang Pengchao, Zhang Cuiping, Yao Xiaobo, Guo Dongqing, Xiao Shuai</i>	
RESEARCH ON THE THINKING AND METHODS OF EXHIBITION PROP DESIGN FROM THE PERSPECTIVE OF SEMIOLOGY	217
<i>Qian Gong</i>	
DESIGN PRINCIPLE OF THE EXHIBITION PROJECT BASED ON USER RESEARCH OF PLANETARIUM	220
<i>Liu Xinxiong, Li Wensi, Li Xuan, Cao Wenqi</i>	
STUDY ON THE DEFORMATION OF PRE-STRESSED CENTRE DIAPHRAGM OF PRESSURE SENSOR	223
<i>He Shen zhi, Hu Guoqing, Zhou Yonghong, Wang Jianling, Zou Chong, Alam Sm Jahangir</i>	

COMPENSATION FOR HARMONIC FLUX AND CURRENT OF PERMANENT MAGNET SYNCHRONOUS MOTOR BY INJECTED HARMONIC VOLTAGE	226
<i>Lu Jun, Yang Jianguo, Liang Steven Y., Ren Ruihong</i>	
PREPARATION AND AGGREGATE FORMATION OF O-HYDROXYPROPYL-N-LAUREL ACYL CHITOSAN RAMIFICATION	230
<i>Tan Funeng, Zhang Zhixin, Zhou Yunbo, Sui Weiping</i>	
RESEARCH OF LOESS DYNAMIC SUBSIDENCE UNDER LOCOMOTIVE VIBRATION LOAD OF THE HIGH-SPEED RAILWAY	234
<i>Yang Tao, Wang Jiading, Luo Huilai, Li Qiang</i>	
DESIGN OF PORTABLE EDM MACHINE TOOL	238
<i>Wang Xuetao</i>	
ANALYSIS OF THE NATURAL VIBRATION FREQUENCY OF SCHWEDLER RETICULATED SHELL STRUCTURES BASED ON FINITE ELEMENT SOFTWARE	242
<i>Jiang Mingmei</i>	
DEVELOPMENT AND PROSPECT OF FRICTION SURFACING TECHNOLOGY	244
<i>Li Mingfeng</i>	
A STUDY OF THE PERFORMANCE OF PEMFC HYBRID VEHICLE USING ADVISOR	247
<i>Liang Jingming, Wu Zefeng</i>	
CONTROL INTERFACE DESIGN OF AIRCRAFT COCKPIT BY THE KANSEI ENGINEERING	251
<i>Ma Jinsheng, Sun Yujie</i>	
RESEARCH OF AUTOMATIC INTERPRETATION OF ANALOG GAUGE'S INDICATING DATA	255
<i>Song Jianbo, Zhang Lei</i>	

INFORMATICS, ECONOMICS AND MANAGEMENT ENGINEERING

THE INNOVATION OF THAI SILK FOR DESIGN AND PRODUCTION OF MUSLIM WOMEN DRESSES	259
<i>Jatuphatwarodom Srikanjana, Chonsakorn Sakorn, Sawanaporn Suttita, Chupinijrobkob Suladach, Wongpatham Waraporn, Khumsingha Uraivan, Suksawad Kornnut, Pholam Kittiyaphan, Ruangnarong Chanakarn, Jatuphatwarodom Natawat, Mongkholrattanasit Rattanaphol</i>	
"MIAO SILVER" ANALYSIS OF MARKETING PRODUCT POSITIONING AND QUANTITATIVE ANALYSIS	262
<i>Liu Jingjing, Liu Li</i>	
ENLIGHTENMENT OF BUSINESS IN CHINA LOW-CARBON ECONOMY IN DEVELOPED COUNTRIES IN VARIOUS FIELDS OF APPLICATION AND PRACTICE	266
<i>Jiao Hongli, Wang Juan</i>	
ANALYSIS ON DETERMINING OF THE PURCHASE PRICE IN THE REPURCHASE STAGE OF A BT PROJECT: A CASE OF RAIL TRANSPORTATION PROJECT	270
<i>Zhong Wei, Jiang Teng-Teng</i>	
HOW SOCIAL FACTORS AFFECT THE DESIGN OF NEW URBAN RESIDENCES	274
<i>Xie Ke, Shen Hui</i>	
QUALITY'S IMPACT ON FOOD DEVELOPMENT IN CHINA	277
<i>Xu Yang, Tan Feng, Peng Xinyi, Li Yukun</i>	
EFFECTS OF FOOD TRACEABILITY APPLIED IN FRESH VEGETABLE SUPPLY CHAIN IN CHINA	280
<i>Xu Yang, Tan Feng, Turner Sandra, Cheng Li, Dong Xiang</i>	
BENEFITS AND RISKS OF ADOLESCENT STRENGTH TRAINING	284
<i>Liao Ting, Xu Shaohua</i>	
RANKING AND AGGREGATION OF FACTORS AFFECTING COMPANIES' ATTRACTIVENESS	288
<i>Dikopoulou Zoumpolia, Papageorgiou Elpiniki, Nápoles Gonzalo, Vanhoof Koen</i>	
RESEARCH ON THE PITCH PATTERN OF VOICE VARIATION	293
<i>Zhang Hongbing</i>	
RESEARCH OF ACO IN DECISION-MAKING OF SKILLS AND TACTICS IN BADMINTON	298
<i>Mao Jie</i>	

Modeling of Nonlinear Dynamics of Drill Strings in a Supersonic Air Flow

L.A. Khajiyeva, A.K. Kudaibergenov

Department of Mathematical and Computer Modeling

Al-Farabi Kazakh National University

Almaty, Kazakhstan

e-mail: khadle@mail.ru, as5kar@mail.ru

Abstract—In this work we study nonlinear lateral vibrations of a drill string moving in a supersonic air flow. A nonlinear mathematical model of drill string vibrations is created on the basis of the nonlinear theory of elasticity making use of the Hamilton principle. Solution to the model is obtained by the Bubnov-Galerkin method in the first, second and third approximations. After reducing to a system of ordinary differential equations the numerical stiffness switching method is applied since the problem appears to be stiff. Comparative analysis of the nonlinear model and its geometrically linear analogue is carried out, and the significance of application of the governing equations taking into account geometric nonlinearity is shown. Drill strings with various parameters of length, operating frequency, axial force, and air flow pressure are investigated.

Keywords - drill string; nonlinear model; lateral vibrations; air flow; stiffness switching method.

I. INTRODUCTION

One of the major problems in the oil and gas industry is failures of drill strings. With the implementation of a Drill String Prevention Quality Improvement Project in 1992 the number of drill string failures has been reduced considerably. To achieve that a big number of mathematical models describing the behavior of drilling systems have been built up. However, at present one of seven drilling rigs still falls out because of the breaks of drill strings, which require large costs for their reconstruction [1].

During the process of drilling diverse types of vibrations such as axial, lateral and torsional ones can occur. Lateral vibrations are considered to be the most damaging of them, more often resulting in the drilling equipment breakdown.

Linear mathematical models describing the motion of drill strings under various types of vibrations were investigated in [2-4]. V.I. Gulyaev and O.I. Borshch [2] constructed vibration modes of drill string tubes with the longitudinal non-uniform preloading, calculated their frequencies and carried out numerical analysis. Dynamic model of a drill string including drill pipes and drill collars was formulated by Y.A. Khulief et al. [3]. For numerical solution the finite element method was applied. In [4] the effect of drilling mud flow speed, drill string weight, weight on bit and angular velocity on drill string vibrations and stability were analyzed. Dynamic nonlinear models of

transverse and axial vibrations of rotating drill strings with axial loading and contact with the borehole wall were studied by [5, 6]. These works also took into account the presence of drilling mud outside the drill string. Models with geometric nonlinearity and initial curvature were investigated in [7, 8]. In [9] authors used the Floquet theory and partial discretization method for analysis of stability of a drill string, and studied its vibrations at finite strains.

In contrast to the previous research, this work aims at studying nonlinear lateral vibrations of a drill string taking into consideration the nonlinear influence of a supersonic air flow. The process of derivation of the nonlinear model is provided. The created model includes rotation of the drill string, impact of the axial load, and pressure of the air flow. Numerical analysis of the model is conducted, after that the obtained results are visualized.

II. DERIVATION OF THE NONLINEAR MODEL

When conducting shallow drilling operations the rotary way of drilling wells is mainly applied. In this case, modeling the motion of a drill string it is necessary to take into consideration its rotation as well.

The mathematical model of the drill string motion is constructed on the basis of the nonlinear theory of elasticity [10]. The drill string is presented as a one-dimensional rod of length l with symmetric cross-section.

Let us consider a global right-handed Cartesian coordinate system centered at point O with the x -, y - and z -axes. Let the z -axis be directed along the axis of the rod. Denote components of displacements over the x -, y - and z -axes by $U(x, y, z, t)$, $V(x, y, z, t)$, $W(x, y, z, t)$, respectively.

We apply the hypothesis of plane sections [11]. The rod is assumed to be isotropic, and the strain components (elongations and shears) to be infinitesimal. We also assume that the angles of rotation are negligible compared to unity, whereas the displacements are not restricted.

Generally, the displacements of any point of the rod can be written in the form [12, 13].

In this work the flat bending of the rod of length l is studied, that is the axis of the rod is supposed to be bent only in the Oyz -plane. The longitudinal displacement along the z -axis and torsion of the rod are neglected. Then the expressions for the displacements can be given in the following form:

$$\begin{cases} V(x, y, z, t) = v(z, t), \\ W(x, y, z, t) = -\frac{\partial v(z, t)}{\partial z} y, \end{cases} \quad (1)$$

where $v(z, t)$ is the displacement of the flexural center of the cross-section along the y -axis owing to bending; $-\frac{\partial v(z, t)}{\partial z}$ is the turning angle of the cross-section around the y -axis under bending.

Taking into account rotation of the drill string, let us introduce a local coordinate system $Ox'y'z'$ rotating along with the drill string [14, 15]. The z' -axis coincides with the direction of the axis of the rod. Let the rotation of the rod be anticlockwise. Then the position of any point of the rod in the local coordinate system relative to the global one can be defined as follows:

$$\begin{cases} x' = (x+U)\cos\phi + (y+V)\sin\phi \\ y' = -(x+U)\sin\phi + (y+V)\cos\phi \\ z' = z+W. \end{cases} \quad (2)$$

Here $\phi = \omega t$ is the turning angle of the rod; ω is the angular speed of the rod.

Let the top end of the drill string be affected by the longitudinal force $N(z, t)$ which is equal to the supporting reaction of the lower end of the drill string on the well bottom. The applied compressing force is considered to be positive.

To obtain the equations of drill string vibrations, we use the Hamilton principle which allows to characterize the drill string motion as a whole for an arbitrary interval of time from t_1 to t_2 [16]. According to this principle

$$\delta J = \int_{t_1}^{t_2} \delta(T - U_0 + \Pi) dt = 0, \quad (3)$$

where U_0 is the potential energy of rod strain, T is the kinetic energy, Π is the potential of external forces, allowing for the effect of the compressing load.

Potential energy U_0 of the rod is given by the Clapeyron formula:

$$U_0 = \iiint_{V_0} \Phi dV_0 = \frac{1}{2} \iiint_{V_0} \sigma_{ij} \varepsilon_{ij} dV_0, \quad (4)$$

where Φ denotes the potential of elastic strain or the elastic potential, $i, j = 1, 2, 3$.

The components of stress tensor σ_{ij} and strain tensor ε_{ij} are connected with the potential as follows:

$$\sigma_{ij} = \frac{\partial \Phi}{\partial \varepsilon_{ij}}, \quad \varepsilon_{ij} = \frac{\partial \Phi}{\partial \sigma_{ij}}.$$

Kinetic energy T of the rod is defined as:

$$T = \frac{1}{2} \iiint_{V_0} \rho (\dot{\mathbf{R}} \cdot \dot{\mathbf{R}}) dV_0 = \frac{1}{2} \int_0^l \int_F \rho (\dot{\mathbf{R}} \cdot \dot{\mathbf{R}}) dF dz, \quad (5)$$

where \mathbf{R} is the radius vector determining the position of any point of the rod, ρ is density.

In our case the radius vector \mathbf{R} is

$$\begin{aligned} \mathbf{R} = & ((x+U)\cos(\omega t) + (y+V)\sin(\omega t))\bar{i} \\ & + (-(x+U)\sin(\omega t) + (y+V)\cos(\omega t))\bar{j} + (z+W)\bar{k}, \end{aligned} \quad (6)$$

where $\bar{i}, \bar{j}, \bar{k}$ are unit vectors.

As in [5, 6, 17], potential of external forces, Π , is given by:

$$\Pi = -\frac{1}{2} \int_0^l N(z, t) \left[\left(\frac{\partial U}{\partial z} \right)^2 + \left(\frac{\partial V}{\partial z} \right)^2 + \left(\frac{\partial W}{\partial z} \right)^2 \right] dz. \quad (7)$$

Substituting (1) into the formulae for the potential energy of the rod, its kinetic energy and the potential of external forces, we integrate them over the cross-section area F . Introducing geometric characteristics

$$I_x = \int_{F(z)} y^2 dF, \quad S_x = \int_{F(z)} y dF = 0, \quad \text{since the } z\text{-axis}$$

coincides with the neutral axis of the rod, the following expressions for the energies and potential of external forces are obtained:

$$U_0 = \frac{G(1-\nu)}{1-2\nu} \int_0^l v_{zz}^2 I_x dz + \frac{GF}{2(1-2\nu)} \int_0^l v_z^4 F dz, \quad (8)$$

where $G = \frac{E}{2(1+\nu)}$ is the shear modulus, E is Young's modulus, ν is Poisson's ratio;

$$T = \frac{1}{2} \rho \int_0^l \left[v_t^2 F + v_{zt}^2 I_x + \omega^2 (I_x + I_y) + \omega^2 v^2 F \right] dz; \quad (9)$$

$$\Pi = \frac{1}{2} \int_0^l N(z, t) \left[\left(\frac{\partial v}{\partial z} \right)^2 + \left(\frac{\partial^2 v}{\partial z^2} \right)^2 y^2 \right] dz. \quad (10)$$

Substituting (8)-(10) in (3) and calculating the variation δJ of the action integral, we obtain the nonlinear dynamic model of motion of a rotating drill string compressed from both ends by the variable longitudinal force $N(z, t)$:

$$\begin{aligned} \rho F \frac{\partial^2 v}{\partial t^2} + EI_x \frac{\partial^4 v}{\partial z^4} - \rho I_x \frac{\partial^4 v}{\partial z^2 \partial t^2} + \frac{\partial}{\partial z} \left(N(z, t) \frac{\partial v}{\partial z} \right) \\ - \frac{EF}{1-\nu} \frac{\partial}{\partial z} \left(\frac{\partial v}{\partial z} \right)^3 - \rho F \omega^2 v = 0. \end{aligned} \quad (11)$$

At that, we neglected the derivatives of order higher than two which are responsible for the contribution of the longitudinal force as in [18].

Boundary conditions for the rod with pinned ends are presented in the form:

$$\begin{aligned} v(z, t) = 0 \quad (z = 0, z = l) \\ EI_x \frac{\partial^2 v(z, t)}{\partial z^2} = 0 \quad (z = 0, z = l). \end{aligned} \quad (12)$$

In order to take into account the impact of a supersonic air flow on the drill string, we use the formula based on the hypothesis of plane sections [19]:

$$P = P_0 \left(1 - \frac{\kappa - 1}{2} \cdot \frac{U_n}{C_0} \right)^{\frac{2\kappa}{\kappa - 1}}, \quad (13)$$

where U_n is the normal component of the air flow speed on the string surface; C_0 is the speed of sound for the unperturbed flow; P_0 is the pressure of the unperturbed flow; κ is the polytropic exponent.

We consider the air moving in the direction opposite to the drill string motion.

The normal component of the air flow speed U_n can be written in the form:

$$U_n = V_g \frac{\partial v}{\partial z}, \quad (14)$$

where V_g denotes the speed of the unperturbed flow.

Expanding (13) in a power series and retaining the first three terms in this expansion, we obtain the final nonlinear model of lateral vibrations of a drill string in a supersonic air flow:

$$\begin{aligned} \rho F \frac{\partial^2 v}{\partial t^2} + EI_x \frac{\partial^4 v}{\partial z^4} - \rho I_x \frac{\partial^4 v}{\partial z^2 \partial t^2} + \frac{\partial}{\partial z} \left(N(z, t) \frac{\partial v}{\partial z} \right) \\ - \frac{EF}{1 - \nu} \frac{\partial}{\partial z} \left(\frac{\partial v}{\partial z} \right)^3 - \rho F \omega^2 v + \Delta P = 0, \end{aligned} \quad (15)$$

where

$$\begin{aligned} \Delta P = P - P_0 = P_0 \kappa \left(-M \frac{\partial v}{\partial z} + \frac{\kappa + 1}{4} M^2 \left(\frac{\partial v}{\partial z} \right)^2 \right. \\ \left. - \frac{\kappa + 1}{12} M^3 \left(\frac{\partial v}{\partial z} \right)^3 \right), \end{aligned} \quad (16)$$

$M = \frac{V_g}{C_0}$ is the Mach number.

III. MODEL CALCULATION

To obtain the solution of the model (15) the Bubnov-Galerkin method is applied. The compressing load is supposed to be constant and distributed along the rod length. The displacement $v(z, t)$ is given by the following expansion:

$$v(z, t) = \sum_{i=1}^n f_i(t) \sin\left(\frac{i\pi z}{l}\right), \quad (17)$$

where $n \leq 3$, that is one, two and three modal approximations of the solution are considered.

Substituting (17) in (15) at $n=3$ and utilizing the Bubnov-Galerkin technique, we obtain a system of three second-order ordinary differential equations:

$$\begin{aligned} a_1 f_1'' + b_1 f_1 + f_1 (c_{11} f_1^2 + c_{12} f_2^2 + c_{13} f_3^2 + c_{14} f_1 f_3) \\ + c_{15} f_2^2 f_3 + d_{11} f_2 + d_{12} f_1 f_3 + d_{13} f_1^2 + d_{14} f_2^2 + d_{15} f_3^2 \\ + f_2 (d_{16} f_1^2 + d_{17} f_2^2 + d_{18} f_3^2 + d_{19} f_1 f_3) = 0, \\ a_2 f_2'' + b_2 f_2 + f_2 (c_{21} f_2^2 + c_{22} f_1^2 + c_{23} f_3^2 + c_{24} f_1 f_3) \\ + d_{21} f_1 + d_{22} f_3 + d_{23} f_1 f_2 + d_{24} f_2 f_3 + f_1 (d_{25} f_1^2 + d_{26} f_2^2) \\ + f_3 (d_{27} f_1^2 + d_{28} f_2^2 + d_{28} f_3^2 + d_{2,10} f_1 f_3) = 0, \\ a_3 f_3'' + b_3 f_3 + f_3 (c_{31} f_1^2 + c_{32} f_2^2 + c_{33} f_3^2) + f_1 (c_{34} f_1^2 \\ + c_{35} f_2^2) + d_{31} f_2 + d_{32} f_1 f_3 + d_{33} f_1^2 + d_{34} f_2^2 + d_{35} f_3^2 \\ + f_2 (d_{36} f_1^2 + d_{37} f_2^2 + d_{38} f_3^2 + d_{39} f_1 f_3) = 0, \end{aligned} \quad (18)$$

where a_i are the constants responsible for the contribution of inertial terms; the constants b_i include the influence of the longitudinal compressing load, centrifugal force and rigidity of the rod; c_{ij} contain geometric nonlinearity; d_{ik} bring the influence of the supersonic air flow, $i = 1, 2, 3$; $j = \overline{1, 4(5)}$; $k = \overline{1, 9(10)}$.

IV. COMPARATIVE ANALYSIS OF MATHEMATICAL MODELS

To be convinced of the need for application of the nonlinear model, it is compared to another model not involving geometric nonlinearity, which we call geometrically linear model, keeping in mind that it retains nonlinearity from the air flow.

Let us consider single-mode approximation of the solution:

$$v(z, t) = f(t) \sin\left(\frac{\pi z}{l}\right). \quad (19)$$

Numerical solution is carried out in the Wolfram Mathematica computational package by the stiffness switching method. This method uses an explicit Runge-Kutta method and a linearly implicit Euler method, and allows to switch between them when the system appears to be stiff. Due to that we can reduce computation time and keep high numerical precision.

Computations were conducted at the following values of the system parameters: $D = 0.2m$ (outer diameter of the drill string), $d = 0.12m$ (inner diameter), $N = 2.2 \times 10^3 H$, $E_{st} = 2.1 \times 10^5 MPa$, $\rho_{st} = 7800 kg/m^3$, $P_0 = 1.013 \times 10^3 Pa$, $\nu_{st} = 0.28$, $M = 2.5$, $\kappa = 1.4$.

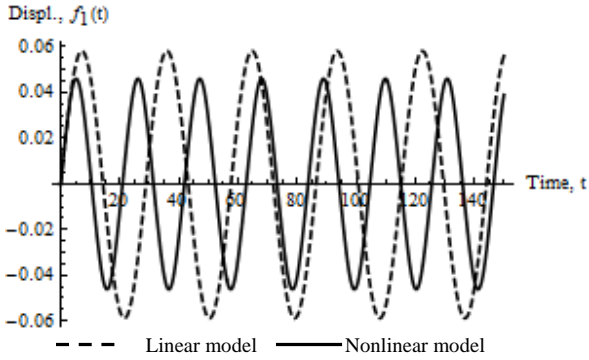


Figure 1. Drill string vibrations at $l = 100m, \omega = 10rpm$.

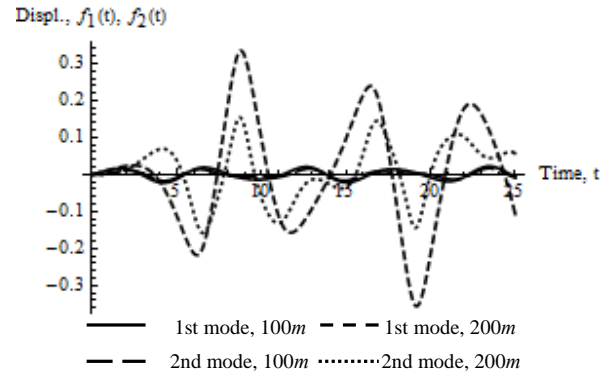


Figure 3. Vibrations of the drill strings of various lengths.

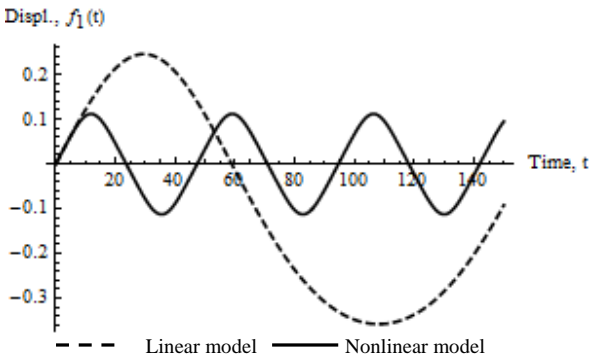


Figure 2. Drill string vibrations at $l = 200m, \omega = 0$.

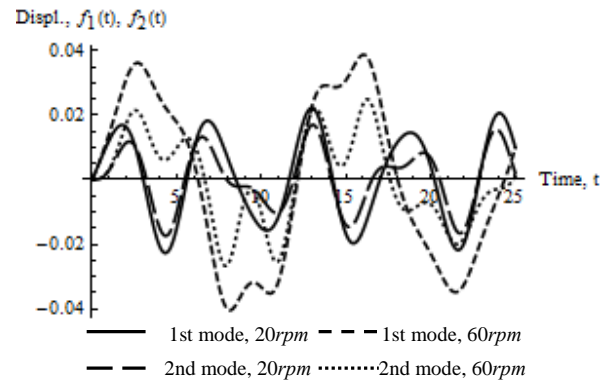


Figure 4. Vibrations of the drill string at different rotation frequencies.

Fig. 1-2 show that the nonlinear model gives smaller amplitude vibrations of the rod than the linear model. With increase in length of the rod or its rotation frequency linear vibrations rise unboundedly, whereas using the nonlinear model we can observe a stable oscillatory process. A similar phenomenon is observed when the pressure of the unperturbed air flow, P_0 , is higher than $10^4 Pa$. These results demonstrate the need for application of nonlinear models when examining lateral vibrations of a drill string moving in a supersonic air flow.

V. ANALYSIS OF THE EFFECT OF THE SYSTEM PARAMETERS

For a more detailed analysis of drill string vibrations let us consider the nonlinear model (17) with the buckling $v(z, t)$ in the second and third approximations.

Initial values of the length and rotation frequency are $l = 100m, \omega = 10rpm$.

Fig. 3-4 were constructed for the double-mode approximation of the solution, Fig. 5-6 for the triple-mode approximation.

As can be seen from Fig. 3, increase in length of the drill string leads to sharp rise in the amplitude of its lateral vibrations. Moreover, the higher the angular speed of rotation, the more intensive the drill string vibrations can be observed (Fig. 4). At the same time the second mode has a considerable influence on the vibrations and should be taken into account while modeling.

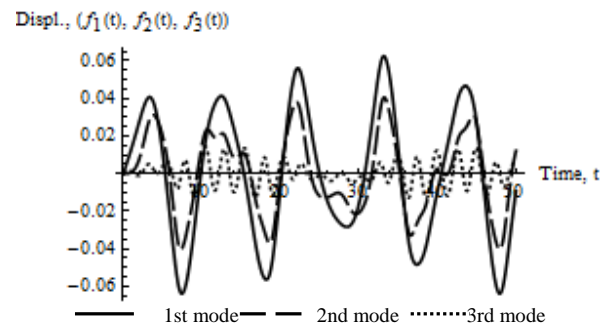


Figure 5. Vibrations of the drill string under the load $N = 3.5 \times 10^4 H$.

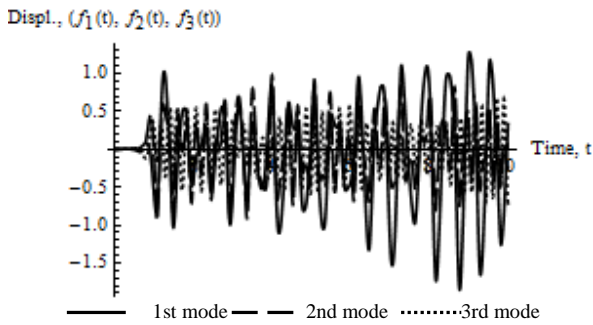


Figure 6. Effect of the air flow parameters: Mach number $M = 4$, pressure $P_0 = 1.013 \times 10^5 Pa$.

With increase in the value of the compressing load the contribution of the third mode to the oscillatory process grows (Fig. 5). Simultaneous rise in speed and pressure of the air flow results in the multiple increase in amplitude and frequency of the drill string vibrations, leading to instability of the system (Fig. 6).

VI. CONCLUSION

In this work the motion of a drill string in a supersonic air flow was modeled. Applying the Hamilton principle a nonlinear mathematical model of lateral vibrations of the drill string presented as a one-dimensional rod was constructed. The use of the Bubnov-Galerkin method allowed to reduce the model to a system of three second-order ordinary differential equations which were solved by means of the stiffness switching method. Comparison with the geometrically linear model showed that the nonlinear model gives smaller amplitude vibrations of the drill string and can be applied at larger values of the system parameters. The influence of various lengths of the drill string, frequency of rotation, compressing loading and the supersonic air flow was studied in double- and triple-mode approximation of the solution. It was found out that the second and third modes contribute significantly to the oscillatory process, and they should be taken into consideration when modeling. Also it was obtained that increase in the parameters leads to the rise of lateral vibrations of the drill string. The longer the string, the greater the influence the external loadings have. At the same time the speed and pressure of the air flow have a great impact on the amplitude of the drill string vibrations as well.

REFERENCES

- [1] M.A. Kiseleva, G.A. Kuznetsov, G.A. Leonov, P. Neittaanmaki, "Drilling systems: stability and hidden oscillations," in: J.A. Tenreiro Machado, D. Baleanu, Albert C.J. Luo, editors, *Discontinuity and complexity in nonlinear physical systems*, Springer, vol. 6, 2014, pp. 287-304.
- [2] V.I. Gulyayev, O.I. Borshch, "Free vibrations of drill strings in hyper deep vertical bore-wells," *J. Petroleum Science Eng.*, vol. 78., 2011, pp. 759-764.
- [3] Y.A. Khulief, F.A. Al-Sulaiman, S. Bashmal, "Vibration analysis of drillstrings with self-excited stick-slip oscillations," *J. Sound. Vib.*, vol. 299, 2007, pp. 540-558.
- [4] A.A. Jafari, R. Kazemi, M.F. Mahyari, "The effects of drilling mud and weight bit on stability and vibration of a drill string," *J. Vib. Acoust.*, vol. 134, 2012, 9 p.
- [5] A.S. Yigit, A.P. Christoforou, "Coupled axial and transverse vibrations of oilwell drillstrings," *J. Sound. Vib.*, vol. 195 (4), 1996, pp. 617-627.
- [6] A.P. Christoforou, A.S. Yigit, "Dynamic modeling of rotating drillstrings with borehole interactions," *J. Sound. Vib.*, vol. 206 (2), 1997, pp. 243-260.
- [7] H.M. Sedighi, A. Reza, "High precise analysis of lateral vibration of quintic nonlinear beam," *Latin American J. Solids Structures*, vol.10, 2013, pp. 441-552.
- [8] L.A. Khajiyeva, "About vibrations and stability of boring rods of shallow drilling in view of geometrical nonlinearity," *Proc. 11th Conf. Vib. Problems*, Lisbon, Portugal, 2013, 10 p.
- [9] L. Khajiyeva, A. Kydyrbekuly, A. Sergaliyev, A. Umbetkulova, "Simulation of movement of drill rods at large deformations," *Advanced Materials Research*, vol. 702, 2013, pp. 253-258.
- [10] V.V. Novozhilov, *Foundations of the Nonlinear Theory of Elasticity*. Moscow-Leningrad: OGIZ, 1948.
- [11] *Vibrations in Engineering: Handbook in 6 vol.*, vol. 1,2. Moscow: Mashinostroenie, 1978. (in Russian)
- [12] A.P. Filippov, *Oscillations of Deformable Systems*, 2nd ed. Moscow: Mashinostroenie, 1970. (in Russian)
- [13] A.P. Filippov, V.N. Bulgakov, Yu.S. Vorob'ev, B.Ya. Kantor, G.A. Marchenko, *Numerical Methods in the Applied Theory of Elasticity*. Kiev: Nauk. dumka, 1968. (in Russian)
- [14] V.I. Gulyaev, S.N. Khudolii, E.I. Borshch, "Wirl vibrations of the drillstring bottom hole assembly," *Strength of Materials*, vol. 42 (6), 2010, pp. 637-646.
- [15] V.I. Gulyaev, V.V. Gaidaichuk, I.L. Solov'ev, I.V. Gorbunovich, "Quasistatic bifurcation states of super-deep vertical drill strings," *J. Mining Science*, Vol. 46(5), 2010, pp. 546-553
- [16] A.A. Samarskii, A.P. Mikhailov, *Principles of Mathematical Modelling: Ideas, Methods, Examples*, 2nd ed. M.: FIZMATLIT, 2005.
- [17] L.V. Smirnov, D.V. Kapitanov, *Dynamics of an Elastic Compressed Rod near Instability: Handbook*. Nizhni Novgorod: University Press, 2010. (in Russian)
- [18] A.I. Munitsyn, "Oscillations of a pipeline loaded by running wave of heating medium," *Vestnik of ISEU*, vol 3., 2008, pp. 28-30.
- [19] A.S. Volmir, *Stability of Deforming Systems*. Moscow: Nauka, 1967. (in Russian)